
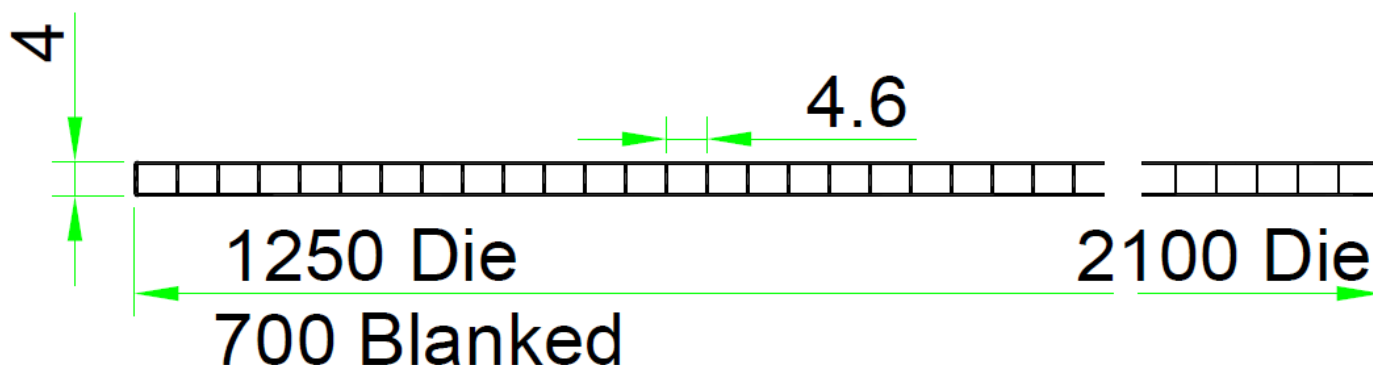


marlonst


LONG LIFE

4mm Twinwall

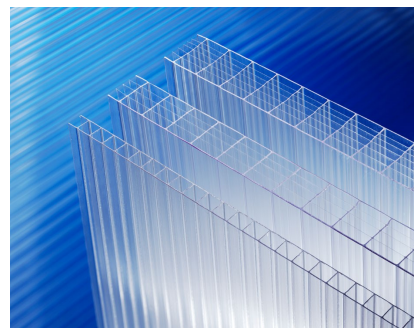

Span/Load Table			
Load (kN/m ²)	Sheet Width		
	700mm	980mm	1250mm
0.4	2.14	1.42	1.1
0.5	1.85	1.25	0.925
0.6	1.69	1.15	0.75
0.7	1.55	1.05	0.645
0.8	1.25	0.95	0.58

Safe span figures are based on 20mm edge engagement plus a safety factor of 1.2

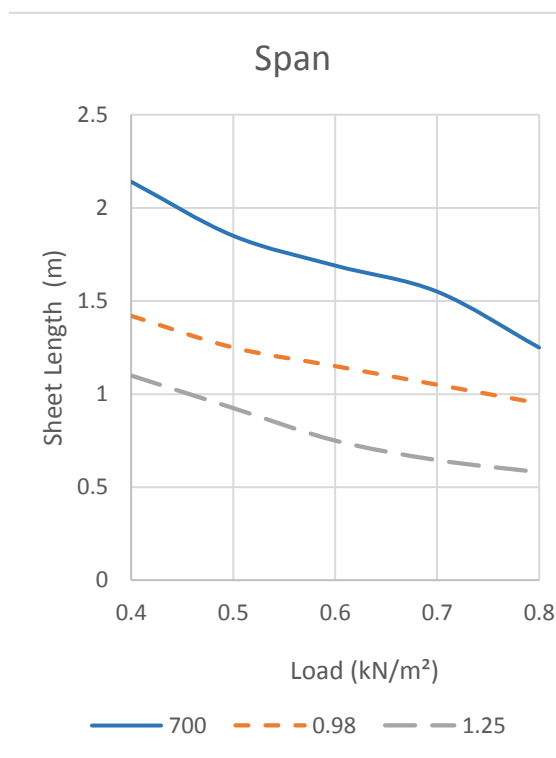

Transmission

Colour	Light	Solar
Clear	85%	84%
Bronze	28%	-
Opal	40%	49%

Product Characteristics

Tolerances	
Width	≤1250 mm +/- 4 mm
	≤2100 mm -0, +8 mm
Length	5 m -0, +10 mm
	Over 5 m -0, +25 mm
Thickness	4mm +/-0.5 mm
Sheet Weight	0.8Kg/m ²
U Value	3.9W/m ² K
Min Curve Radius	600mm



Access Plastics Ltd.

Access Plastics Ltd., pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Access Plastics Ltd., Unit 16 Ashbourne Industrial Estate, Ashbourne, Co Meath. Ireland. A84 W972.
Tel: + 353 1801 0022 Email: sales@accessplastics.com

www.accessplastics.com | www.365plastics.ie | www.polycarbonatesheets.ie



MARLON ST is the multiwall polycarbonate sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes, clear and tinted. MARLON ST Longlife has a coextruded UV protection layer on one side.

Warranty

There is 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

Quality

Manufactured under ISO 9001 to EN 16153

Handling & Safety

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations

Storage

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage.

Installation

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

Service Temperature

For stable prolonged service ranging from -20°C to 100°C . (Short term unstressed -40°C to 130°C)

Maintenance

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.



Access Plastics Ltd.

Access Plastics Ltd., pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Access Plastics Ltd., Unit 16 Ashbourne Industrial Estate, Ashbourne, Co Meath, Ireland. A84 W972.
Tel: + 353 1801 0022 Email: sales@accessplastics.com

www.accessplastics.com | www.365plastics.ie | www.polycarbonatesheets.ie