




CLEANING

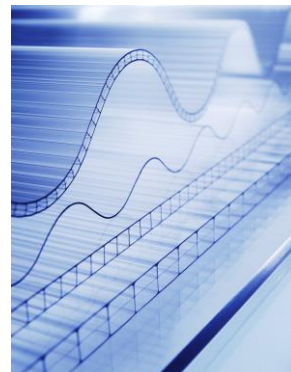

In order to maintain Marlon polycarbonate in a good condition it is recommended that the sheet be cleaned periodically using suitable household cleaning agents.

The recommended cleaning instructions are as follows:

- Use lukewarm water to rinse and soften dirt.
- Make up a solution of lukewarm water and ordinary household cleaner or mild soap and use this to wash the sheet.
- A sponge or soft cloth should then be used to gently remove dirt and grime.
- For large areas a pressure washer may be used.
- Ethyl alcohol or white kerosene used sparingly can be used to remove paint and other such substances.
- The cleaning process should then be repeated and the sheet rinsed with clean water and dried with a soft cloth.

Warning

The following precautions should be observed:

- Do not scrub the sheet with brushes or sharp implements.
- Do not use squeegees.
- Avoid solvents, other than those listed, or any abrasive cleaners.
- Avoid cleaners of a highly alkaline composition.
- Avoid cleaning in the hot sun or high temperatures.



Access Plastics Ltd., pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Access Plastics Ltd., Unit 16 Ashbourne Industrial Estate, Ashbourne, Co Meath. Ireland. A84 W972.
Tel: + 353 1801 0022 Email: sales@accessplastics.com