


marlon fs

Storage

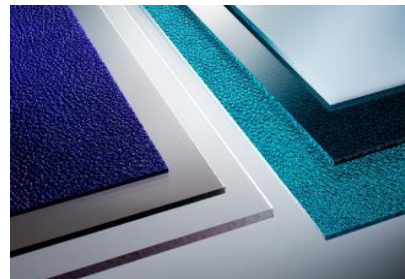

Storage

In order to maintain Marlon FS/FSX in a good condition it is recommended that the sheet be stored in accordance with the points below:

- Marlon sheets should be stacked horizontally, preferably on a continuous non-abrasive, flat, dry surface; on suitably constructed pallets or on timber bearers at least 100mm wide spaced at intervals not exceeding 500mm.
- Stack height should not exceed 1 metre.
- Sheets of differing length should not be placed on the same stack.
- Always store indoors where possible.
- If storage outdoors cannot be avoided then, particularly in the case of on-site storage while building construction progresses, a secure storage site should be provided, well away from foot and vehicle traffic and ongoing construction work.
- All sheets stored outdoors must be covered with a reflective, opaque, waterproof cover.
- Secure all covers to prevent the ingress of sunlight, wind and rain.

Warning

The following precautions should be observed:

- Always wear gloves when handling Marlon FSX sheeting.
- Take great care when handling sheets in windy conditions.



Access Plastics Ltd., pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Access Plastics Ltd., Unit 16 Ashbourne Industrial Estate, Ashbourne, Co Meath. Ireland. A84 W972.
Tel: + 353 1801 0022 Email: sales@accessplastics.com