
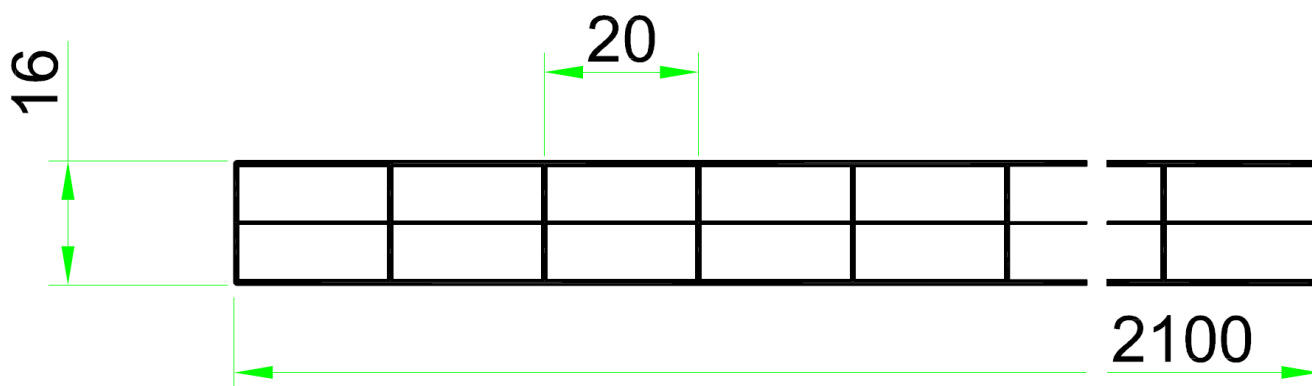


marlonst

LONG LIFE

16mm Triplewall 2.7kg

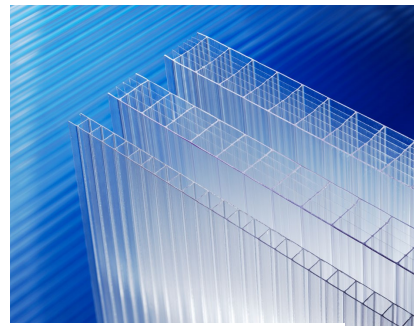


Span/Load Table

Load (kN/m ²)	Sheet Width (mm)		
	700	980	1250
0.50			2.7
0.75		3.5	2.0
1.00		2.4	1.7
1.25	4.4	2.0	1.5
1.50	2.8	1.8	1.4

Safe span figures are based on 20mm edge engagement plus a safety factor of 1.2

Load/Span

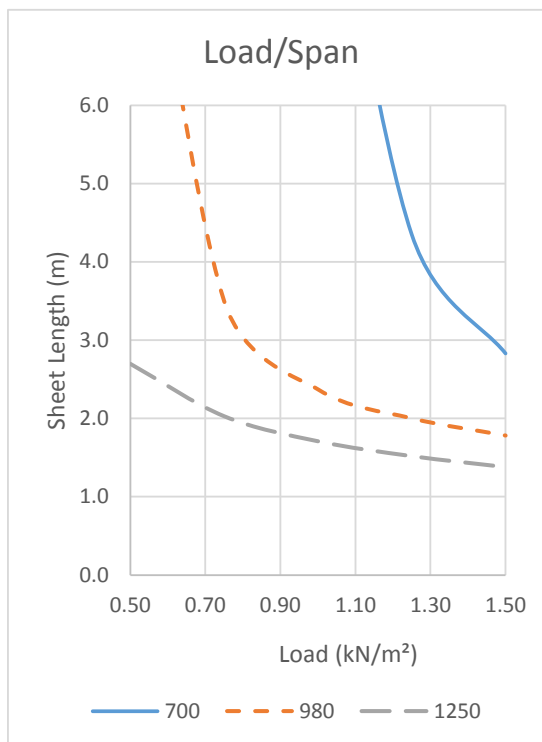

Transmission

Colour	Light	Solar
Clear	77%	73%
Bronze	18%	44%
Opal	42%	47%

Product Characteristics

Tolerances	
Width	<1250mm +/- 4 mm <2100mm -0, +8 mm
Length	6 m -0, +10 mm Over 6 m -0, +25 mm
Thickness	16mm +/-0.5 mm
Sheet Weight	2.7 Kg/m ²
U Value	2.4 W/m ² K
Min Curve Radius	2400mm



Access Plastics Ltd., pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Access Plastics Ltd., Unit 16 Ashbourne Industrial Estate, Ashbourne, Co Meath. Ireland. A84 W972.
Tel: + 353 1801 0022 Email: sales@accessplastics.com

Access Plastics Ltd.

www.accessplastics.com | www.365plastics.ie | www.polycarbonatesheets.ie



MARLON ST is the multiwall polycarbonate sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes, clear and tinted. MARLON ST Longlife has a coextruded UV protection layer on one side.

Warranty

There is 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

Quality

Manufactured under ISO 9001: 2008 to EN 16153:2013

Handling & Safety

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations

Storage

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage.

Installation

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

Service Temperature

For stable prolonged service ranging from -20°C to 100°C . (Short term unstressed -40°C to 130°C)

Maintenance

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.

